


# Push-in fittings

## ELBOW PUSH-IN FITTING (150 bar)

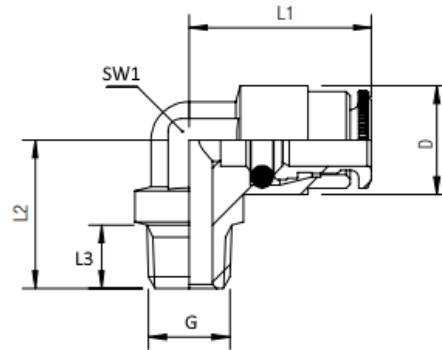

Partnr	PA PIPE	G	L1	L2	L3	SW1	D
2839-3000-0405	4	M6x0,75	18	15	6	8	10,5
2839-3000-0406	4	M6x1	18	15	6	8	10,5
2839-3000-0408	4	M8x1	18	15	6	8	10,5
2839-3000-0409	4	M8x1,25	18	15	7	8	10,5
2839-3000-0410	4	M10x1	18	15	6,5	8	10,5
2839-3000-0411	4	M10x1,5	18	16,5	7,5	8	10,5
2839-3100-0402	4	R1/8	18	16,5	7,5	8	10,5
2839-3100-0404	4	R1/4	18	21,5	11	8	10,5
2839-3000-0605	6	M6x0,75	21	17	6	10	13
2839-3000-0606	6	M6x1	21	17	6	10	13
2839-3000-0608	6	M8x1	21	17	6	10	13
2839-3000-0609	6	M8x1,25	21	18	7	10	13
2839-3000-0610	6	M10x1	21	17	6,5	10	13
2839-3000-0611	6	M10x1,5	21	17	7,5	10	13
2839-3100-0602	6	R1/8	21	17,5	7,5	10	13
2839-3100-0604	6	R1/4	21	21,5	7,5	10	13

Material: Brass (nickel plated)

Coupling is equipped with HNBR o-ring

Maximum pressure with liquids: 150 bar

Maximum pressure with air: 30 bar

Temperature range:

Min -30° / Max +150°

Threads:

Tapered gas in conformity with ISO7.1, BS21, DIN2999

Metric tapered in conformity with UNI 7707

Connecting hoses:

plastic hoses: PA6, PA66 for high pressure

PA11, PA12, polyethylene, polyurethane PEF, PTFE.