


Push-in fittings

ELBOW PUSH-IN FITTING ROTATABLE (150 bar)

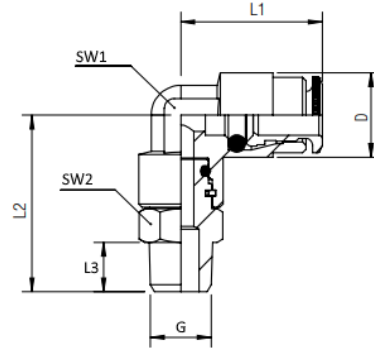

Partnr	PA PIPE	G	L1	L2	L3	SW1	SW2	D
2837-3000-0406	4	M6x1	18	22,5	6	8	11	10,5
2837-3000-0408	4	M8x1	18	22,5	6	8	11	10,5
2837-3000-0409	4	M8x1,25	18	26,5	7	8	11	10,5
2837-3000-0410	4	M10x1	18	22,5	6,5	8	11	10,5
2837-3000-0411	4	M10x1,5	18	26,5	7,5	8	11	10,5
2837-3100-0402	4	R1/8	18	24	7,5	8	11	10,5
2837-3100-0404	4	R1/4	18	26,5	11	8	14	10,5
2837-3000-0606	6	M6x1	21	25,5	6	10	11	13
2837-3000-0608	6	M8x1	21	25,5	6	10	11	13
2837-3000-0609	6	M8x1,25	21	26,5	7	10	11	13
2837-3000-0610	6	M10x1	21	22,5	6,5	10	11	13
2837-3000-0611	6	M10x1,5	18	27	7,5	10	11	13
2837-3100-0602	6	R1/8	21	27	7,5	10	11	13
2837-3100-0604	6	R1/4	18	30	11	10	14	13

Material: Brass (nickel plated)

Coupling is equipped with HNBR o-ring

Maximum pressure with liquids: 150 bar

Maximum pressure with air: 30 bar

Temperature range:

Min -30° / Max +150°

Threads:

Tapered gas in conformity with ISO7.1, BS21, DIN2999
Metric tapered in conformity with UNI 7707

Connecting hoses:

plastic hoses: PA6, PA66 for high pressure
PA11, PA12, polyethylene, polyurethane PEF, PTFE.